


In three simple steps you reconfigure the EnergyManager after replacing a MyReserve device:

IMPORTANT

Before changing device settings in the EnergyManager SmartSetup, the previous MyReserve device must be uninstalled and the installation of the replacement device must be completely finished.


1. Search and Install MyReserve

- **SmartSetup > Search for devices**
- Select the entry **MyReserve** in the Search drop-down list and add the device to the search
- Start the search by clicking on **Search and Install devices** and find all MyReserve devices again.

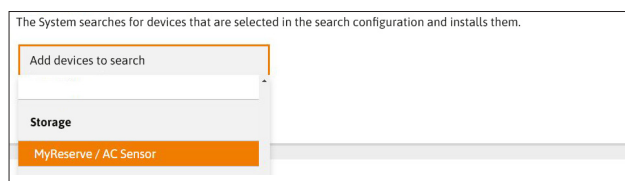


2. Perform device exchange in SmartSetup

- **SmartSetup > Search devices > Device list**
- Click on the gear icon next to the device to be replaced
- Select **Replacing a device**

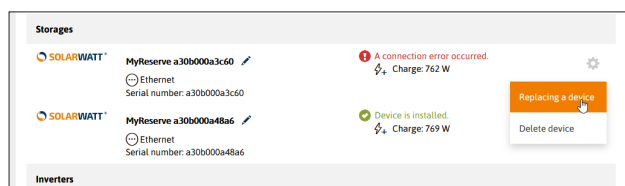


- Select the new MyReserve device and click **Replacing a device**
- new MyReserve replaces the old device, historical data is retained

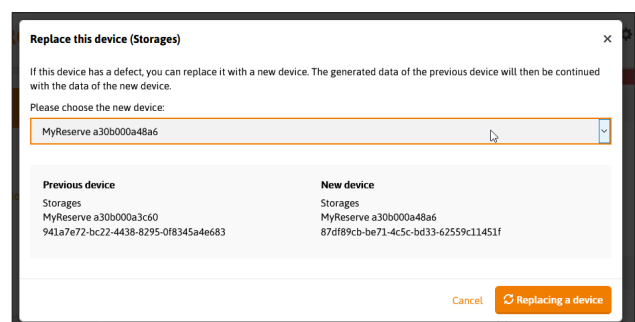

3. Check MyReserve Allocation

- **SmartSetup > PV plants**
- Check that the new MyReserve is assigned to the correct PV plant
- Confirm assignment with **Save and continue**

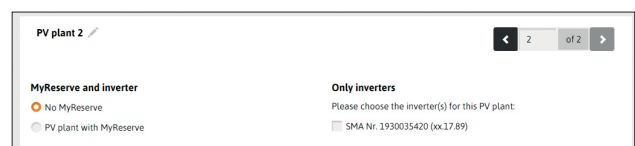

- **SmartSetup > Household consumption**
- Check whether the new MyReserve is allocated to the category **Devices measured by the primary meter („on the house-side“)**. Otherwise, select **Change device assignment** and classify MyReserve as a **device measured by the primary meter**.

Any Questions?

Your customer advisor or our technical support will be happy to help you.

SOLARWATT GmbH

Maria-Reiche-Straße 2a, 01109 Dresden, Germany
 +49-351-8895-333, technik@solarwatt.com
www.solarwatt.com